

HCMOS 2.5x2mm 1.0 V SMD Oscillator



Model: F200 SERIES

RoHS Compliant / Pb Free

Rev. 12/2/2010

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm

Need a Sample®

• PART NUMBER SELECTION [Learn More - Internet Required](#)

Part Number	Model Number	Frequency Stability ¹	Operating Temperature (°C)	Frequency Range (MHz)
823-Frequency-xxxxx	F200	±100PPM	-10 ~ +70	1.800 ~ 50.000
823A-Frequency-xxxxx	F200R	±100PPM	-40 ~ +85	1.800 ~ 50.000
823B-Frequency-xxxxx	F205	±50PPM	-10 ~ +70	1.800 ~ 50.000
823C-Frequency-xxxxx	F205R	±50PPM	-40 ~ +85	1.800 ~ 50.000
823D-Frequency-xxxxx	F206	±25PPM	-10 ~ +70	1.800 ~ 50.000
823E-Frequency-xxxxx	F206R	±25PPM*	-40 ~ +85	1.800 ~ 50.000
823F-Frequency-xxxxx	F208	±20PPm*	-10 ~ +70	1.800 ~ 50.000

• ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.800 ~ 50.000 MHz
Storage Temperature Range (Tstg)	-55°C ~ +125°C
Supply Voltage (VDD)	1.0V ± 5%
Input Current (IDD)	
1.800 ~ 32.100 MHz	2.5mA
32.100+ ~ 50.000 MHz	3.5mA
Output Symmetry (50% VDD)	40% ~ 60%
Rise Time (20% ~ 80% VDD)	
1.800 ~ 32.100 MHz	5.0nS
32.100+ ~ 50.000 MHz	3.5nS
Fall Time (80% ~ 20% VDD)	
1.800 ~ 32.100 MHz	5.0nS
32.100+ ~ 50.000 MHz	3.5nS
Output Voltage (VOL)	20% VDD
(VOH)	80% VDD Min
Output Current (IOL)	2mA Min
(IOH)	-2mA Min
Output Load (HCMOS)	15pF
Standby Current	5µA
Start-up Time (Ts)	5mS
Output Disable Time ²	250nS
Output Enable Time ²	5mS
Maximum Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au


¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, and vibration. *Excludes shock and vibration.

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Notes:

*A 0.01µF capacitor should be placed between VDD (Pin 4) and GND (Pin 2) to minimize power supply noise.

*Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary. All specifications subject to change without notice.

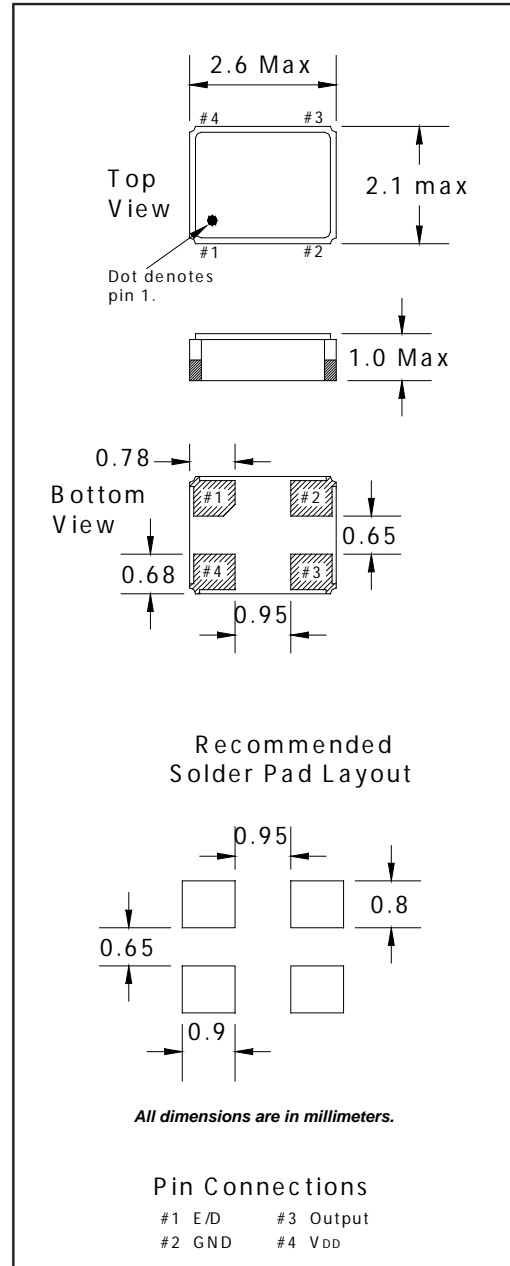

• ENABLE / DISABLE FUNCTION

Pin 1	OUTPUT (Pin 3)
OPEN ²	ACTIVE
'1' Level $V_{IH} \geq 70\% V_{DD}$	ACTIVE
'0' Level $V_{IL} \leq 30\% V_{DD}$	High Z

HCMOS 2.5x2mm 1.0 V SMD Oscillator



Model: F200 SERIES

RoHS Compliant / Pb Free

Rev. 12/2/2010

Page 2 of 2

http://www.foxonline.com/need_a_sample.htm

Need a
Sample®

• TAPE SPECIFICATIONS (millimeters)

MODEL	A	B	C	D	E	F	STD Reel QTY
F200 Series	∅1.5	4.0	4.0	3.5	8.0	1.15	3,000

• REEL SPECIFICATIONS (millimeters)

MODEL	G	H	I	J	K	L	M
F200 Series	2.0	∅13	∅21	∅60	∅180	9.0	2.0

